

acer



- Triple monitor support (HDMI, DP, Type-C)
- Supports 8K video output via DP¹
- Dual LAN:
 - One can serve as backup
 - Can set up internal and external networks for increased security
 - Increase efficiency by balancing network traffic
- Small form factor (volume <1L)
- Supports Wi-Fi 6; faster & safer
- Supports GigaLAN
- Front I/O easy access
- Full function USB-C (DP Alt, USB 3.2 Gen 2, 15W PD)

¹ Specifications may vary by model

Veriton NUC N1502G



Powerful CPU
Performance



Dual LAN



Upgradable
Storage & Memory



15W
USB 3.2
Power Delivery
USB Type-C™



Wi-Fi 6
Wireless
Connection



Tiny Form Factor




Combo Audio Jack

SPECIFICATIONS

Veriton NUC

VN1502G

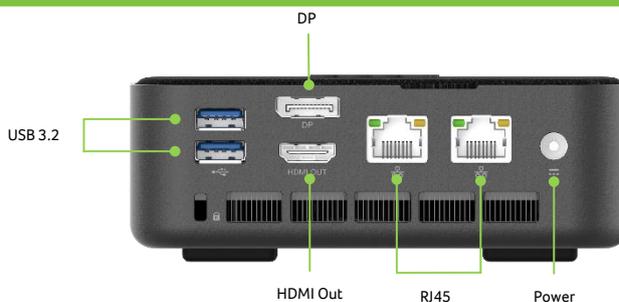

Dimensions	W x H x D	131 x 131 x 43 mm (5.16 x 5.16 x 1.69 inch)	
Weight	Net Weight	< 1.0 kg (2.2 lbs)	
CPU	Type	Intel® 12 th Gen Processor N-series N100	Intel® 13 th Gen Core™ i Processor Ci31315U, Ci51334U and Ci71355U
Memory	Channels	Single Channel	Dual Channel
	Type	DDR4 SO-DIMM x1	DDR4 SO-DIMM x2
	Max Memory	Max 16GB	Max 64GB
Graphics		Intel® UHD Graphics	Intel® UHD Graphics
Expansion slot		M.2 2230 Slot x1 (for WLAN)	M.2 2230 Slot x1 (for WLAN)
		M.2 2280 Slot x1 (for SSD)	M.2 2280 Slot x2 (for SSD)
Audio	Type	Senary HD Audio SN6140	Senary HD Audio SN6140
	Channel	Stereo	Stereo
LAN	Chip	Realtek 8111	Realtek 8111
	Speed	100 / 1000 Mbps	100 / 1000 Mbps
Front I/O	Connectivity	x2, Type-A (USB3.2 Gen2)	x2, Type-A (USB3.2 Gen2)
		x1, Type-C PD15W (USB3.2 Gen2, Full-functioned)	x1, Type-C PD15W (USB3.2 Gen2, Full-functioned)
	Audio Jack	x1 (Combo Audio)	x1 (Combo Audio)
	Power Button	x1 (with LED)	x1 (with LED)
	Reset Button	x1 (Clear CMOS)	x1 (Clear CMOS)
	DC Input	x1 (12V /19V)	x1 (12V /19V)
Rear I/O	HDMI Port	x1 HDMI 2.1 (4K@60Hz)	x1 HDMI 2.1 (4K@60Hz)
	DisplayPort	x1 Displayport 1.4 (4K@60Hz)	x1 Displayport 1.4a (8K@60Hz)
	Connectivity	x2 Type-A (USB3.2 Gen1)	x2, Type-A (USB3.2 Gen2)
	RJ45 LAN Port	x2 (GigaLAN)	x2 (GigaLAN)
	Kensington Lock Hole	x1	x1
Power Supply		36W(12V, 3A) AC Adapter	65W (19V, 6.32A) AC Adapter
Operating Temperature		0 ~ 40°C (32 ~ 104°F)	0 ~ 40°C (32 ~ 104°F)
Storage Temperature		-20 ~ 60°C (-4 ~ 140°F)	-20 ~ 60°C (-4 ~ 140°F)

About Acer

Founded in 1976, Acer is one of the world's top ICT companies with a presence in more than 160 countries. As Acer evolves with the industry and changing lifestyles, it is focused on enabling a world where hardware, software and services will fuse with one another, creating ecosystems and opening up new possibilities for consumers and businesses alike. Acer's 7,500 employees are dedicated to the research, design, marketing, sale, and support of products and solutions that break barriers between people and technology. Please visit www.acer.com for more information.